



**DELTA
Series**
Cost-Effective
Solutions for
Diesel-Driven
Hydrostatic
Machinery





ABOUT GUARDIAN COUPLINGS

For more than 70 years, Guardian has been designing and manufacturing world-class couplings and other power transmission components. Utilizing advanced manufacturing technologies and processes, Guardian provides highly-reliable coupling and component solutions to meet the most challenging industrial application requirements.

Guardian provides a wide range of standard and custom products including flywheel couplings, hydraulic pump mounts, bearing supported stub shafts, flexible shaft-to-shaft couplings, motion control couplings as well as compression pipe couplings.

Durable Guardian products are utilized in key industries including mobile hydraulics, farm & ag, tree care, concrete, food & beverage, material handling, automation, power generation, and oil & gas on applications such as skid steers, aerial lifts, harvesters, wood chippers, concrete pumps, dewatering pumps, baggage handlers, conveyors, robotics, compressors, and generator sets.



ALTRA COUPLINGS

Altra Couplings offers the largest selection of industrial couplings available from a single source...worldwide. For over 150 years, TB Wood's, Ameridrives, Bibby Turboflex, Lamiflex, Guardian and Huco, the industry-leading brands of Altra Couplings have been providing innovative coupling solutions to meet the requirements for a broad variety of drivetrain applications spanning many industries including energy, metals, mining, oil & gas, and food processing. Highly-engineered Altra coupling products represent the latest in coupling technology, featuring superior design and exceptional quality to ensure long-lasting performance in all types of environments.



APPLICATIONS

Guardian Industries has introduced the DELTA Series flexible coupling line for use on diesel-driven hydrostatic machinery and construction equipment. The cost effective DELTA single-piece design incorporates a splined and hardened steel hub that is pre-assembled into the glass-fiber reinforced flange. The DELTA coupling attaches to the engine flywheel, taking advantage of elastomeric grommets that provide a steady dampening effect to normal engine vibrations. Although the coupling incorporates rubber bushings for dampening, it is relatively stiff which allows equipment with low inertia to operate below the critical speed range.

This coupling is suited for accurately aligned drives that minimize misalignments. The DELTA Series is able to accommodate small angular, parallel, and axial misalignments that are typical to piloted flange connections. The DELTA series couplings can achieve torque capacities of up to 6,130 IN-LBS nominally. These high performance couplings are designed for demanding applications on the latest tier engines.

FEATURES & ADVANTAGES

- **Accepts Straight & Splined Shafts**

The DELTA series steel hub can be manufactured with a straight bore and keyway with set screw retention for the straight pump shaft demands. A spline shaft connection is also acceptable and incorporates a “plugin” design.

- **Single Piece Design**

The DELTA’s single piece design eliminates extra fasteners and reduces installation costs for blind splined-shaft set-ups. (Straight shaft connections consist of a two piece design).

- **Environment**

This lightweight coupling is oil resistant and will provide a long service life in temperatures of -40 to 212 degrees Fahrenheit.

- **Reduced Spline Fretting**

Elastomeric grommets absorb shock loading and reduce transmitted vibration – two major factors that contribute to pump spline fretting.

- **Minimum Maintenance Required**

The splined and hardened alloy steel hub is greased at assembly with lithium based grease that enables extended service intervals in service conditions up to 212 degrees Fahrenheit.





- **Economical Solution**

The DELTA series by Guardian is an affordable way to provide higher torque ratings from our traditional designs, while benefiting from its dampening capabilities.



Limited configurations are currently available. Guardian is currently expanding the DELTA Series to service our customer’s requests. Please give us a call today to discuss your application.

DIMENSIONS

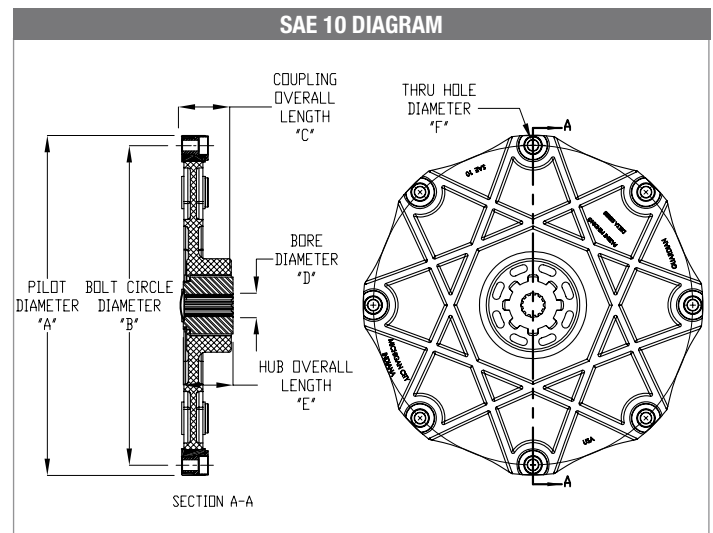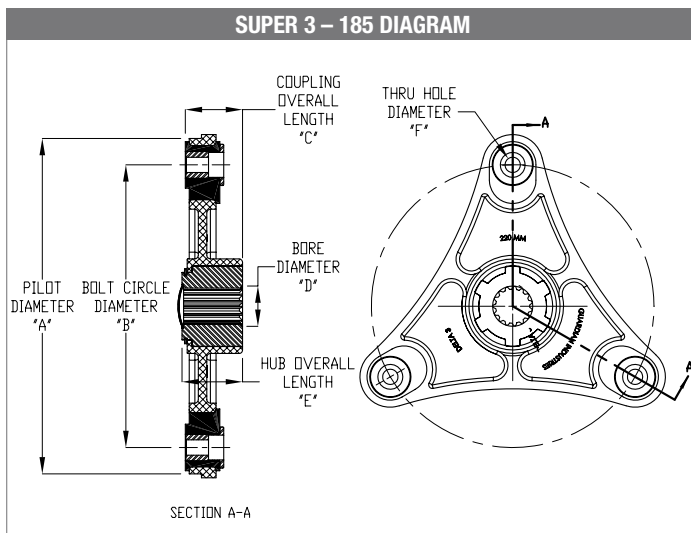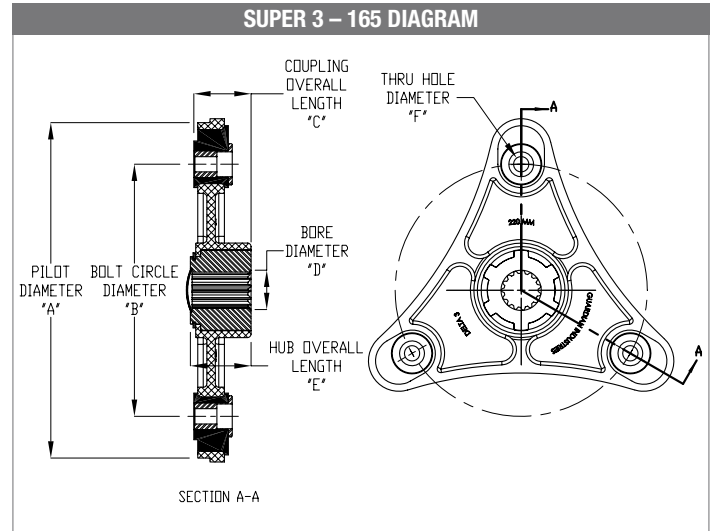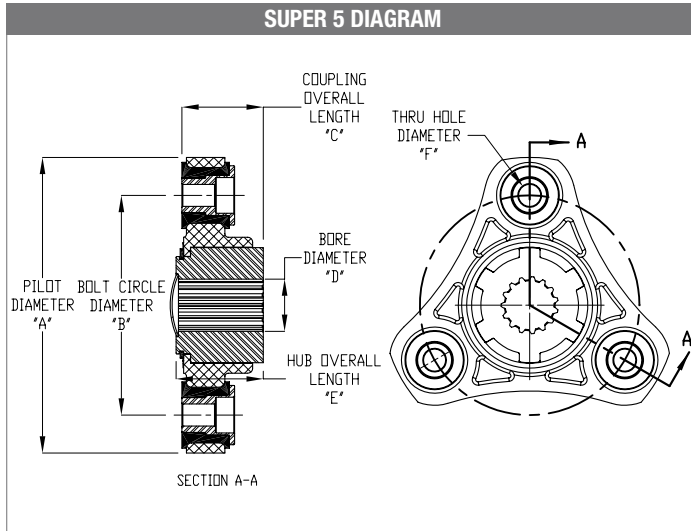

Series	A	B	C	D		E	F	# of Hub Teeth
	Outer Diameter	Bolt Circle Diameter	Overall Length	Min	Max	Hub Overall Length	# of Bolt Holes/ Diameter	
SUPER 5	5.315" (135 MM)	3.937" (100 MM)	1.457"	.50"	1.250"	1.562"	3X / .394" (10MM)	6
SUPER 3 - 165	8.661" (220 MM)	6.496" (165 MM)	1.475"	.50"	1.250"	1.562"	3X / .472" (12MM)	6
SUPER 3 - 185	8.661" (220 MM)	7.283" (185 MM)	1.475"	.50"	1.250"	1.562"	3X / .394" (10MM)	6
SAE 10 - SD	12.375" (314.3MM)	11.625" (295 MM)	1.868"	.754"	1.250"	1.813"	8X / .394" (10MM)	8
SAE 10 - HD	12.375" (314.3 MM)	11.625" (295 MM)	1.970"	.877"	1.750"	2.125"	8X / .394" (10MM)	10

TECHNICAL DATA


Series	Nominal Torque**	Maximum Torque**	HP @ 1800 RPM	Misalignment		Temperature Range
	IN-LBS	IN-LBS		Parallel INCHES	Axial INCHES	
SUPER 5	1,065	2,663	30	.008	+/- .030	-40° F TO 212° F
SUPER 3 - 165	1,595	3,987	45	.008	+/- .030	
SUPER 3 - 185	1,595	3,987	45	.008	+/- .030	
SAE 10 - SD	3,150	7,875	90	.008	+/- .030	
SAE 10 - HD	6,130	15,325	175	.008	+/- .030	

* The DELTA Series is able to accommodate small angular, parallel, and axial misalignments that are typical to piloted flange connections only. The Delta Series is not recommended for applications that have excessive angular misalignment.







**The torque values listed are for ambient temperatures. Torque capacities may be reduced at lower and higher temperatures within the -40° F to 212° F temperature range listed. Please review temperature service factors.

TEMPERATURE SERVICE FACTORS

-40° F	0° F	73° F	125° F	160° F	212° F
1.50	1.30	1.00	1.30	1.50	1.95

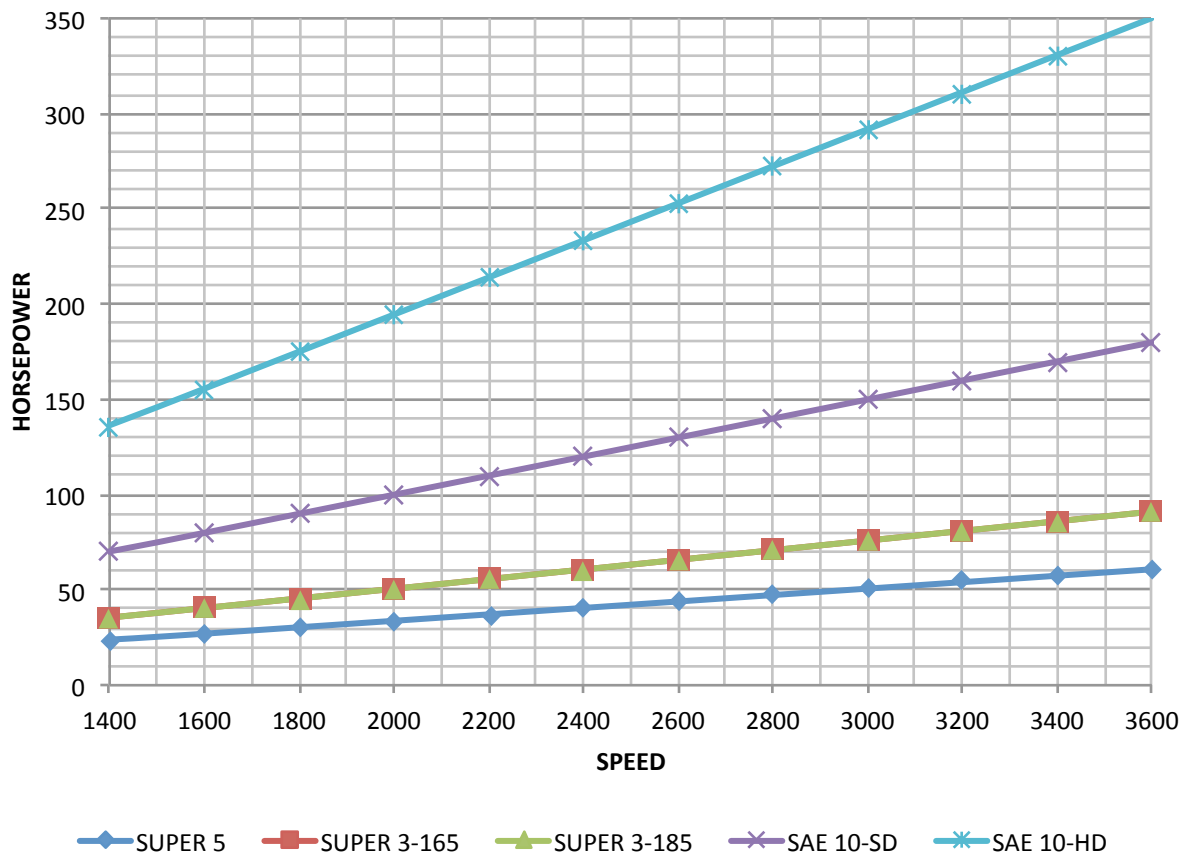

ASSEMBLY CONFIGURATIONS

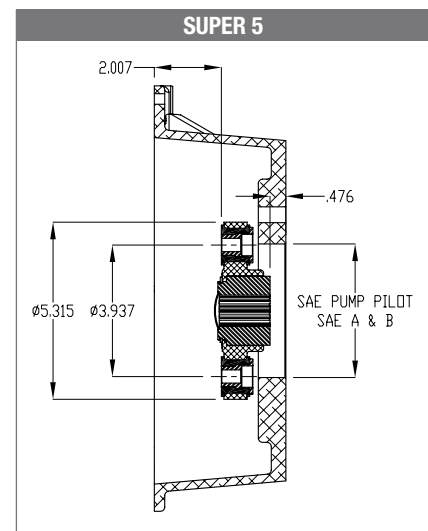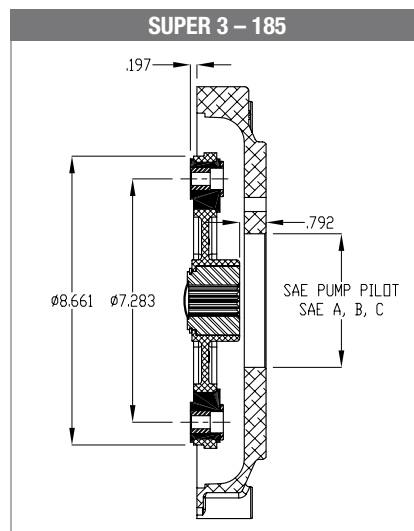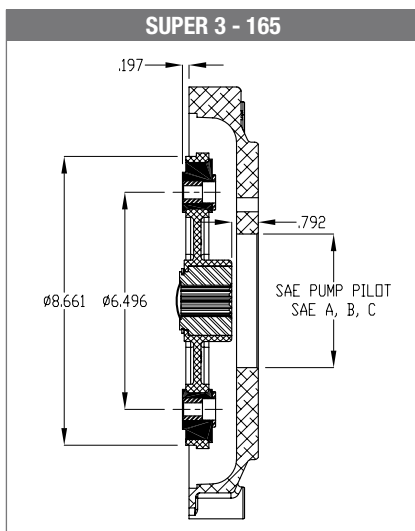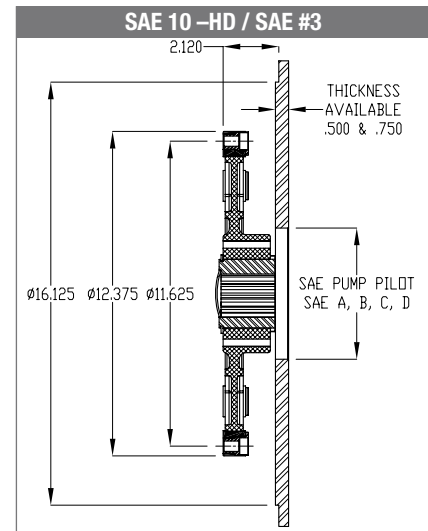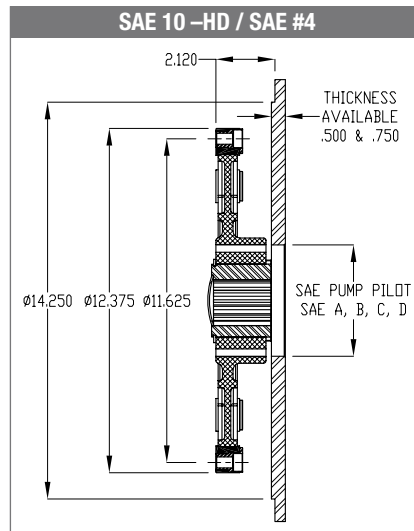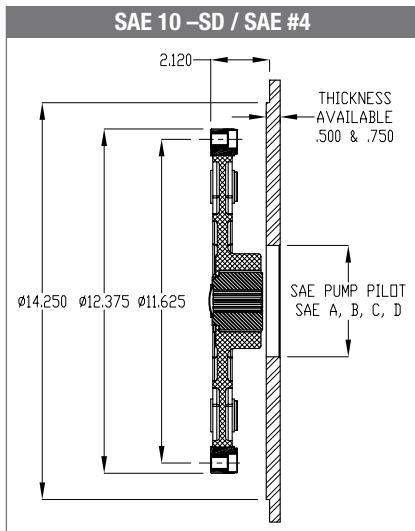

Note: Super Kubota Super 3 & Super 5 configurations are available in both aluminum and cast iron pump mount designs.



SUPER 5



SUPER 3



SAE 10

Altra Couplings

OFFERS THE LARGEST SELECTION OF INDUSTRIAL COUPLINGS AVAILABLE FROM A SINGLE SOURCE...WORLDWIDE

The industry-leading brands of Altra Couplings, **TB Wood's**, **Huco**, **Bibby Turboflex**, **Ameridrives**, **Guardian Couplings** and **Lamiflex Couplings**, have been providing innovative coupling solutions to meet the requirements for a broad variety of applications spanning many industries. Highly engineered Altra coupling products represent the latest in coupling technology, featuring superior design and exceptional quality to ensure long-lasting performance in all types of environments.

WWW.ALTRACOUPLINGS.COM



ELASTOMERIC COUPLINGS

TB Wood's
Bibby Turboflex
Guardian Couplings




GRID & GEAR COUPLINGS

Bibby Turboflex
Ameridrives



COUPLING GUARDS & BEARING ISOLATORS

Lamiflex Couplings



GEAR SPINDLES

Ameridrives



UNIVERSAL JOINTS

Ameridrives



TORQUE LIMITERS

Bibby Turboflex



PRECISION COUPLINGS

Huco
Guardian Couplings



FLYWHEEL COUPLINGS, ENGINE HOUSINGS & PUMP MOUNTS

Guardian Couplings
TB Wood's



HIGH PERFORMANCE DISC & DIAPHRAGM COUPLINGS

Ameridrives
Bibby Turboflex
Lamiflex Couplings



GENERAL PURPOSE DISC COUPLINGS

TB Wood's
Ameridrives
Bibby Turboflex
Lamiflex Couplings

Guardian Couplings Facilities

North America

USA

300 Indiana Highway 212
Michigan City, IN 46360
219-874-5248

*Engineered Flywheel Couplings, Engine
Housings and Pump Mounts, Flexible
Shaft Couplings*

Europe

United Kingdom

Merchant Drive, Hertford
Hertfordshire SG13 7BL - England
+44(0)1992 501900

*Engineered Flywheel Couplings, Engine
Housings and Pump Mounts, Flexible
Shaft Couplings*

The Brands of Altra Motion

Couplings

Ameridrives
www.ameridrives.com

Bibby Turboflex
www.bibbyturboflex.com

Guardian Couplings
www.guardiancouplings.com

Huco
www.huco.com

Lamiflex Couplings
www.lamiflexcouplings.com

Stromag
www.stromag.com

TB Wood's
www.tbwoods.com

Linear Systems

Thomson
www.thomsonlinear.com

Warner Linear
www.warnerlinear.com

Geared Cam Limit Switches

Stromag
www.stromag.com

Engineered Bearing Assemblies

Kilian
www.kilianbearings.com

Electric Clutches & Brakes

Matrix
www.matrix-international.com

Stromag
www.stromag.com

Warner Electric
www.warnerelectric.com

Deltran
www.thomsonlinear.com

Belted Drives

TB Wood's
www.tbwoods.com

Heavy Duty Clutches & Brakes

Twiflex
www.twiflex.com

Stromag
www.stromag.com

Svendborg Brakes
www.svendborg-brakes.com

Wichita Clutch
www.wichitaclutch.com

Gearing & Specialty Components

Bauer Gear Motor
www.bauergears.com

Boston Gear
www.bostongear.com

Delevan
www.delevan.com

Delroyd Worm Gear
www.delroyd.com

Nuttall Gear
www.nuttallgear.com

Engine Braking Systems

Jacobs Vehicle Systems
www.jacobsvehiclesystems.com

Precision Motors, Drives & Controls

Kollmorgen
www.kollmorgen.com

Miniature Motors

Portescap
www.portescap.com

Overrunning Clutches

Formsprag Clutch
www.formsprag.com

Marland Clutch
www.marland.com

Stieber
www.stieberclutch.com

Neither the accuracy nor completeness of the information contained in this publication is guaranteed by the company and may be subject to change in its sole discretion. The operating and performance characteristics of these products may vary depending on the application, installation, operating conditions and environmental factors. The company's terms and conditions of sale can be viewed at <http://www.altramotion.com/terms-and-conditions/sales-terms-and-conditions>. These terms and conditions apply to any person who may buy, acquire or use a product referred to herein, including any person who buys from a licensed distributor of these branded products.

©2018 by Guardian Couplings LLC. All rights reserved. All trademarks in this publication are the sole and exclusive property of Guardian Couplings LLC or one of its affiliated companies.



www.guardiancouplings.com

P-7719-GC 1/19